


OS-214



Argox OS-214P adalah Printer Label yang mendukung pencetakan dalam 2 mode yaitu Direct Thermal (Tanpa ribbon) dan Thermal Transfer (Menggunakan Ribbon). Printer ini sangat cocok digunakan di usaha seperti ritel, jasa pengiriman, supermarket, dan warehouse. Dengan ukuran tempat ribbon hingga 300m, printer ini sangat bisa digunakan untuk aktivitas print yang berat. Ribbon yang didukung printer ini adalah tipe face in dan face out. OS-214P sangat siap untuk mendukung aktivitas bisnis kalian.

TAMPILOAN

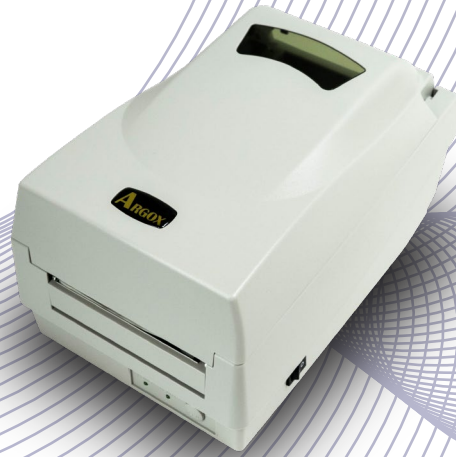

DEPAN



DALAM

ARGOX
a **AVATO** company

Barcode Printer

OS-214

KEUNGGULAN

Durabilitas Tinggi

Head printer dapat bertahan 2- 3 tahun dengan pemakaian yang berat

Ribbon Maksimal

Ribbon yang digunakan maksimal hingga 300 meter

Berkualitas

Menghasilkan cetakan yang berkualitas dan telah teruji untuk mencetak dalam jumlah yang banyak

Support 2 Tipe Cetak

Dapat mencetak dengan 2 tipe, yaitu: Direct Thermal dan Thermal Transfer

GENERAL

Model	OS-214plus
Printing method	Direct Transfer/ Thermal Transfer
Printing resolution	203 dpi (8dots/mm)
Printing speed	Up to 4ips(102mm/s)
Printing length	Max 43"(1092mm)
Printing width	Max 4.16" (105mm)
Memory	8MB DRAM (6MB user available) 4MB Flash ROM (2MB user available)
CPU type	32 bit RISC microprocessor
Media sensor	Reflective x 1
Operation interface	LED indicator(Power/ Ready)x2, Button(Feed)x1
Communication Interface	Centronics Parallel, RS-232(Baud rate 2400 ~ 115200 bps), USB
Operation Environment	Operation : 40°F~100°F (4°C~38°C), 10% ~ 90% non-condensing, Storage : -4°F~122°F (-20°C~50°C)
Graphics	PPLA: PCX, BMP, IMG, HEX ,GDI
Emulation	PPLB: PCX, Binary raster, GDI PPLA/PPLB/PPLZ (OS -2140Z,OS-2140DZonly)
Software-Label editing	Windows Driver (Win XP/ Vista/Windows 7/ 8/10) BarTender
Software-Utility	Printer Utility, Font Utility

PHYSICAL

Dimensions	W 186 x H 153 x L 278mm
Weight	2.0kgs

ELECTRICAL

Power Source	Universal Switching Power Supply Input: 100V~240V 1.5A, 50~60Hz Output: 24VDC, 2.4A
---------------------	---

MEDIA & RIBBON

Fonts	Internal character sets standard 5 alpha-numeric fonts from 0.049"H ~ 0.23" H (1.25mm ~ 6.0mm) Internal fonts are expandable up to 24x24 4 direction 0 ~ 270 rotation Soft fonts are downloadable
1D Barcodes	OS-214plus: PPLA: Code 39, Code 93, Code 128/subset A/B/C, Codabar, Interleaved 2 of 5, UPC A/E/2 /5 add-on, EAN-13/8, UCC/EAN 128, Postnet, Plessey, Interleaved 2 of 5, Interleaved 2 of 5 with a modulo 10 checksum, Interleaved 2 of 5 with a modulo 10 checksum and shipping bearer bars , Code 128, UCC/EAN, Code 128 Random Weight, HBIC, Telepen , FIM PPLB: Code 39, Code 93, Code 128/ subset A,B,C, Codabar, Interleaved 2 of 5, Interleaved 2 of 5 with check sum digit, Interleaved 2 of 5 with human readable check digit, Matrix 2 of 5, UPC A/E 2 and 5 add-on, EAN-8/13, Code 128UCC, UCC/EAN, Postnet
2D Barcodes	OS-214plus: PPLA: PDF-417, MaxiCode, Data Matrix (ECC200 only) ,QR Code, Composite codes PPLB: MaxiCode, PDF-417, QR Code, Composite codes
Media Type	Roll-feed, die-cut, continuous, fan-fold, tags, ticket in thermal paper or plain paper and fabric label
Media	Max Width:4.33"(110mm) Min Width:1"(25.4mm) Thickness:0.0025"~0.01" (0.0635~0.254mm) Max roll capacity(OD):4.3"(109mm) Core size:0.5"(12.7mm) (1"(25.4mm) optional)
Ribbon	Ribbon Width: 1"~4" Ribbon roll – max OD: 1.45"(37mm) Ribbon Length: max 92m Core size – ID: 0.5"(13mm) with notch Wax, Wax/Resin, Resin (Outside Ribbon)

ARGOX
a **AVATTO** company

Barcode Printer

OS-214

APLIKASI PRODUK

- Penjualan Online
- Label Barang
- Supermarket
- Dan usaha lainnya

Toko

Cafe

Supermarket

Logistik